


Rockcote specifications and technical information relating to project:

Megaboard Specification

Specification for:
AR Building Solutions
8 Greenhill Road
Wayville
SA 5034

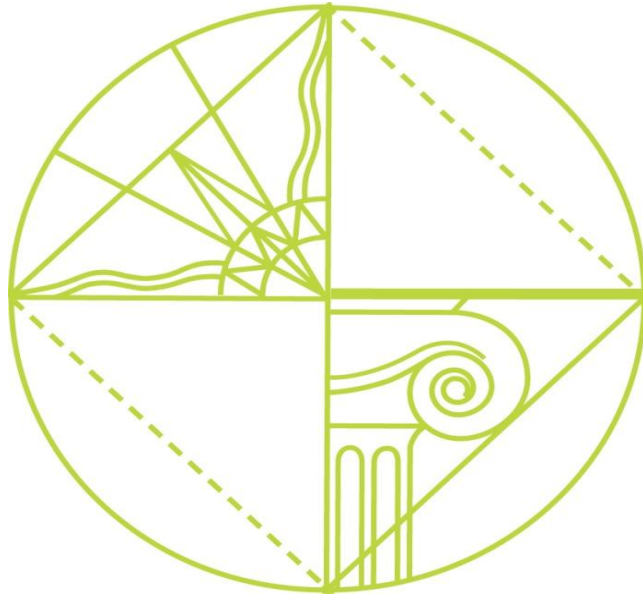

Date of Specification: 5th March 2015
Specification Number: 3976

Specification Number: 3976
Date of Specification: 5th March 2015

Application Over: **Megaboard**
 Finish Required: **Armoured Acrylic Texture Medium**

Surface Preparation:

Surface Preparation: Substrate must not contain more than 15% moisture (WME) prior to the application of the Rockcote acrylic products used within this system. Certain types of air dried MGO board can retain large quantities of water when wet. **Sheets should be installed strictly in accordance with manufacturer's specifications.** Rockcote recommends the installation of control/relief joints at no more than 6m for vertical relief joints and 3m for horizontal relief joints. Substrate must be clean and free of dust, dirt, oil, salt, mould or any other contamination. Patch, tape and set all recessed joints with Rockcote patch n prep and 155gsm Non Adhesive Alkali Resistant Mesh Tape.

Important: Megaboard Board sheeting requires a minimum 1mm DFT (Dry Flim Thickness) acrylic render over the keycote surface. Rockcote does not recommend the use of dark colours with a LRV (Light Reflectance Value) of less than 40% over Megaboard Sheeting.

Please read all relevant Technical Data Sheets & Material Safety Data Sheets prior to product use.

Step 1	Product Used	Rockcote Patch & Prep & Rockcote Mesh
	Application Method	Trowel or Spatula
	Curing Time	24-48hrs
Step 2	Product Used	Rockcote Keycote
	Application Method	Trowel
	Spreading Rate	14m ² /20kg
	Dry Coating Thickness	1.4-2mm
	Curing Time	24-48 hrs
Step 3	Product Used	Rockcote Acrylic Texture Medium
	Application Method	Trowel
	Spreading Rate	12m ² /15ltr
	Dry Coating Thickness	1mm
	Curing Time	24hrs
Step 4	Product Used	Rockcote Armour
	Application Method	Roller or Spray
	Spreading Rate	4m ² /ltr
Step 5	Product Used	Rockcote Armour
	Application Method	Roller or Spray
	Spreading Rate	4m ² /ltr
	Dry Coating Thickness	86 microns
	Curing Time	4-6hrs

Warranty Information

The above specification is eligible for a 15 year system warranty when applied in accordance with the relevant technical specifications. Rockcote warrants all its coatings and coatings systems when applied in accordance with the relevant technical specifications. This warranty not only ensures the client's protection but also Rockcote's ongoing commitment to quality

Specification Number: 3976
Date of Specification: 5th March 2015

Application Over: Megaboard
Finish Required: Sandcote

Surface Preparation:

Surface Preparation: Substrate must not contain more than 15% moisture (WME) prior to the application of the Rockcote acrylic products used within this system. Certain types of air dried MGO board can retain large quantities of water when wet. **Sheets should be installed strictly in accordance with manufacturer's specifications**. Rockcote recommends the installation of control/relief joints at no more than 6m for vertical relief joints and 3m for horizontal relief joints. Substrate must be clean and free of dust, dirt, oil, salt, mould or any other contamination. Patch, tape and set all recessed joints with Rockcote patch n prep and 155gsm Non Adhesive Alkali Resistant Mesh Tape.

Important: Megaboard sheeting requires a minimum 1mm DFT (Dry Film Thickness) acrylic render over the keycote surface. Rockcote does not recommend the use of dark colours with a LRV (Light Reflectance Value) of less than 40% over Megaboard Sheeting.

Please read all relevant Technical Data Sheets & Material Safety Data Sheets prior to product use.

Step 1	Product Used	Rockcote Patch & Prep & Rockcote Mesh
	Application Method	Trowel or Spatula
	Curing Time	24-48 hrs
Step 2	Product Used	Rockcote Keycote
	Application Method	Trowel
	Spreading Rate	14m ² /20kg
	Dry Coating Thickness	1.4-2mm
Step 3	Drying Time	24-48 hrs
	Product Used	Rockcote Texprime (Tinted)
	Application Method	Roller or Spray
	Spreading Rate	5-6m ² /ltr
Step 4	Drying Time	4-6hrs
	Product Used	Rockcote Sandcote
	Application Method	Trowel
Step 5	Curing Time	24-48 hrs
	Product Used	Rockcote Repel
	Application Method	Roller or Spray
	Spreading Rate	4-6m ² /ltr
	Curing Time	4-6hrs

Warranty Information

The above specification is eligible for a 15 year system warranty when applied in accordance with the relevant technical specifications. Rockcote warrants all its coatings and coatings systems when applied in accordance with the relevant technical specifications. This warranty not only ensures the client's protection but also Rockcote's ongoing commitment to quality